

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C10M 171/00	A1	(11) International Publication Number: WO 96/40850 (43) International Publication Date: 19 December 1996 (19.12.96)
(21) International Application Number: PCT/US96/06526 (22) International Filing Date: 20 May 1996 (20.05.96) (30) Priority Data: 08/474,891 7 June 1995 (07.06.95) US (71) Applicant: UNITED COLOR MANUFACTURING, INC. [US/US]; Suite 1G, 630 Newtown-Yardley Road, Newtown, PA 18940 (US). (72) Inventors: SMITH, Michael, J.; 225 Cliveden Drive, Newtown, PA 18940 (US). DESAI, Bharat; 4 Ash Court, Ringwood, NJ 07456 (US). (74) Agents: KJELDGAARD, Richard, H. et al.; Howrey & Simon, 1299 Pennsylvania Avenue, N.W., Washington, DC 20004 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: COLORED TRANSMISSION FLUID (57) Abstract Automatic transmission fluid containing a red dye stable even in long-lived transmission fluids.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

COLORED TRANSMISSION FLUID

BACKGROUND

Automatic transmission fluid is a composition based upon selected grades of petroleum hydrocarbon oils incorporating essential performance additives.

- 5 Additives include, for instance, anticorrosion agents, antifoaming agents, viscosity improvers and a red dye. The latter is added to provide an immediately visible characteristic to distinguish the automatic transmission fluid from other oily fluids used in automotive systems including, for example, lubes, brake and power steering fluids. The nature and degree to which the additives are present in automatic
- 10 transmission fluid is specified by the automotive manufacturers notably the Dextron® series of specification issued by General Motors Corporation and the Mercon® specifications issued by the Ford Motor Company, specifications which have also been widely adopted by other automotive manufacturers. In all of these specifications, where a red dye is called for, the dye used is either the dry powder
- 15 dye identified generically in the "Colour Index," a joint publication of the American Association of Textile Chemists and Colorists and the Society of Dyers and Colourists (UK), as C.I. Solvent Red 24 or its tinctorially equivalent analogue C.I. Solvent Red 164. The disclosure of this publication is incorporated herein by reference. The latter dye is supplied as a liquid dye concentrate and is now
- 20 generally preferred over C.I. Solvent Red 24 because of its greater convenience of handling. Both C.I. Solvent Red 24 and 164 belong to the chemical class of azo dyes.

- After the conventional passenger automobile fitted with an automatic transmission has been driven for about 40,000 miles, the transmission fluid becomes degraded chemically. During this period the dye additive also degrades and the
- 25 originally bright pink or red transmission fluid turns initially to an orange shade,

and ultimately to a dark brown color. This loss of red color is then often used as a visual indication that the fluid needs to be replaced which incurs expense and possible environmental hazards if the spent fluid is not disposed of properly. Prolonged use of degraded automatic transmission fluid, beyond its manufacturers
5 recommended lifespan, considerably accelerates wear and damage to the automotive transmission system.


More recently, the manufacturers of ATF have made products with a considerably extended usable lifespan, i.e., 100,000 miles or even 200,000 miles or more in standard passenger vehicles. When these improved fluids are colored with
10 C.I. Solvent Red 24 or C.I. Solvent Red 164, however, the dyes continue to degrade at essentially the same rate in the more stabile fluids as they did in the older grades of ATF. This may cause some to believe that the extended life characteristics of the ATF have been misrepresented because, in the automotive servicing industry, "everybody knows" that when ATF changes from red to brownish-orange, it is life-
15 expired, notwithstanding the manufacturers' claims to the contrary. Consequently, the use of a red dye with a persistence commensurate to the extended life of the ATF has become very desirable.

Summary of the Invention


The present invention provides a colored automatic transmission fluid, a
20 liquid dye concentrate soluble in transmission fluid and methods of coloring transmission fluid with a long-lived red colorant.

Detailed Description of Invention

The coloration of automotive transmission fluid, particularly automatic transmission fluid, in high stability red shades can be achieved by use of certain N-
25 substituted derivatives of 1,5 diaminoanthraquinone, either alone or in mixed compositions containing up to 50% of the analogous derivatives of 1,8 diaminoanthraquinone. The compounds of the invention can be symbolized as:

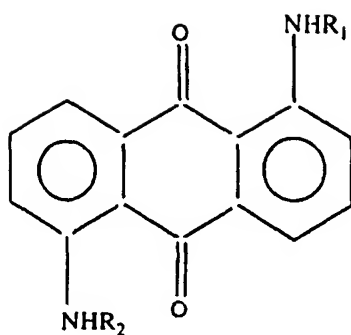


I.




II.

where R₁ and R₂ are the same or different alkyl or substituted alkyl groups, a cycloalkyl group containing at least 3 carbons or 2 alkylphenyl or 2 alkyloxyphenyl group. The alkyl, cycloalkyl and substituted alkyl groups contain at least 2 carbons each. The alkyl groups preferably contain 2-12 carbons and the substituted alkyl groups contain up to 12 atoms. In addition, alkylaryl-amino-anthraquinone compounds of the following formulas may be used separately or as mixtures:

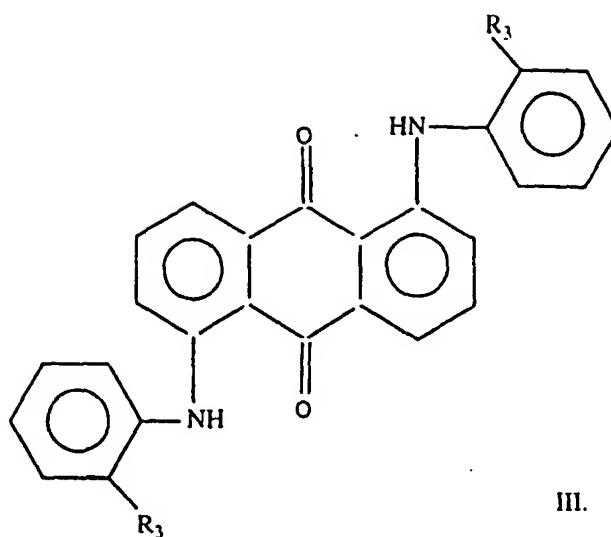

5

10

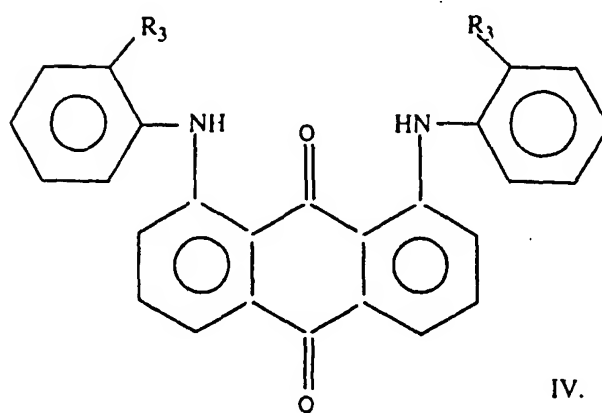

where R_3 is an alkyl or alkoxy group containing at least 2 carbons, preferably 2 - 12 carbons.

The general method of synthesis of the preferred compounds of this invention is well known to those skilled in the art. It involves the reaction of 1,5 or 1,5/1,8 mixtures of dihalogeno, especially dichloro, or dinitro anthraquinones with aliphatic, 2 alkyl or 2 alkoxy anilines; optionally in the presence of an acid binding agent. For instance, U.S. Patent 659,565, the disclosure of which is incorporated herein in its entirety by reference, indicates that especially 1,5 and 1,8 di p-tolylamino anthraquinones, or mixtures thereof, can be synthesized according to the general principles already recited using p-toluidine as the amine reagent. A general method for making 1,5 and 1,8 dinitro-anthraquinones is summarized below:

10 To 2500 kg 25% oleum is added 260 kg anthraquinone in 3-5 hours at 30°C. and 1050 kg mixed acid (28% nitric acid) run in. The temperature slowly raises to 50-55°C. and the charge is then heated to 100°C. and maintained there for 10 hours. It is then cooled to 25°C. and filtered in an iron press. The cake is taken up with 400 liters of water, filtered,
15 washed and dried. The expected yield is 380 kg.

Another reference whose teachings can be used by one of ordinary skill to make dyes of the present invention is FIAT 1313, Vol. II at page 20, the disclosure of which is incorporated herein by reference.

A patent which is useful in making a liquid concentrate form of dyes of the present invention is U.S. Patent 3,597,254, the disclosure of which is incorporated
20 herein by reference. Columns 3-4 (mixture No. 11) and Column 7 (mixture No. 6), of U.S. Patent 3,596,254 disclose particularly useful amine mixtures for this purpose. The concentrate will be made by forming or placing the dye in a suitable carrier that is readily soluble in automatic transmission fluid, such as xylene. The dye
25 preferably comprises 20-60% by weight of the concentrate. The concentrate of the present invention is preferably freeze-stable upon prolonged storage. That is, it does not crystallize to a commercially unacceptable degree after prolonged storage at 0°C.

For instance, commercially undesirable crystallization will not occur after one month of storage at 0°C.

The compound 1,5 di p-tolylamino anthraquinone is a commercially available product identified generically in the "Colour Index" as C.I. Solvent Violet 14.

- 5 Although this product has good heat stability in automatic transmission fluid, it is unacceptable for use since it is undeniably a violet and not a red dye. Red dye derivatives of 1,5/1,8 diaminoanthraquinone can only be achieved when the N-substituents of the molecule defined above are incorporated.

- Methods of making arylanthraquinones are also well known. Methods
10 suitable for use in conjunction with the present invention are set forth in U.S. Patent 2,100,392, the disclosure of which is incorporated herein by reference.

Transmission fluids useful in the present invention include conventional fluids that are commercially available and long-lived transmission fluids that may last 100,000 miles, 200,000 miles or even more under normal passenger vehicle use.

- 15 Although use of long-lived automatic transmission fluids are preferred, dyes of the present invention may also be used in more conventional automatic transmission fluids with normal useful life of about 50,000 miles under ordinary passenger vehicle use. When used with conventional fluids having an expected useful life of about 50,000 miles, the color intensity of the red dye will persist sufficiently to identify the
20 transmission system as the source of a leak of petroleum fluid from that part of the vehicles system even when the fluid is near the end of its useful life. When used in long-lived fluids, those having an expected useful life of 75,000 miles, 100,000 miles, 200,000 miles or even more, the color intensity of the dye persists sufficiently through the life of the fluid to impart a visible red color to the composition. With
25 use of this invention, therefore, instances of unnecessary disposal of long-lived transmission fluid merely because of color changes can be minimized or avoided.

Automatic transmission fluids, both conventional and long-lived fluids, are lubricating oils with additives incorporated to make the oil useful as an automatic transmission fluid. These additives are ordinarily specified by the vehicle manufacturer as previously noted. Formulators of transmission fluid are familiar with the additives required to provide automatic transmission fluid and can readily provide acceptable fluids.

The following examples serve to illustrate, but do not limit, the scope of the invention.

Example 1

10

A 500 mL reaction flask is charged with 14 grams of 1,5 dichloroanthraquinone, 30 grams of xylene, 10 grams of anhydrous sodium acetate and 25 grams of cyclohexylamine. The mixture is heated to reflux and maintained overnight with condensate returned past a Dean and Stark trap. A thin layer chromatography (TLC) analysis is utilized to determine whether the formation of 1,5 dicyclohexylamino anthraquinone is complete. After the reaction is complete, the flask contents are cooled to 80°C and 200 mL of methanol is added. The flask contents are cooled to 20°C. The product is separated in a good crystalline form; vacuum filtered; and then sequentially washed with methanol, 50% aqueous methanol, and water to remove any inorganic salts. The product is oven dried at 80°C. The dye is sparingly soluble in uncolored automatic transmission fluid to produce a crimson red coloration.

Example 2

A 500 mL heated, stirred reaction flask is charged with 14 grams of 1,5 dichloroanthraquinone, 60 grams of xylene, 10 grams of sodium acetate and 45 grams of (2' ethylhexyloxy) propylamine. The mixture is heated to reflux and held overnight. After the reaction is complete, the flask contents are cooled to 90°C. A

solution of 30 grams of acetic acid in 200 mLs of a 10% aqueous sodium chloride solution is added. The mixture is raised to reflux, held for 15 minutes, then cooled to 85°C and transferred to a separatory funnel. A lower aqueous phase containing the unreacted amines, dissolved as their acetate salts, is run off. The upper organic
5 phase containing the dye is then replaced in the flask and stripped under vacuum to 180°C to remove all volatile material. The experiment yields 53 grams of red oil which is set to a waxy solid at ambient temperatures. It is readily soluble in uncolored automatic transmission fluid and produces a crimson red coloration.

Example 3

10 The procedure of example 2 is followed, except the 45 grams of 3(2'ethylhexyloxy) propylamine is replaced by a mixture of 11 grams of 2 ethylhexylamine, 8 grams of methoxypropylamine and 15 grams of 3(2'ethylhexyloxy) propylamine. When the condensation is complete, the reaction mixture is again extracted with a saline acetic acid mixture and the dye phase is
15 returned to the flask. After distilling any entrapped water, xylene is then added to bring the weight of nonvolatiles and xylene to 215 grams and this mixture is then filtered. The product is a stable homogenous liquid instantly miscible with uncolored automatic transmission fluid and produces a crimson red shade. The xylene-based liquid concentrate of the dye remains very fluid, and has complete
20 resistance to crystallization even after prolonged storage at 0° Fahrenheit.

Example 4

30 grams of a mixture of 1,5 and 1,8 dinitroanthraquinones prepared by the method disclosed in FIAT 1313, Volume II, page 220 is charged in a stirred 500 mL reaction flask. 85 grams of a high-boiling alkyl naphthalene solvent is then added,
25 followed by 16 grams of methoxypropylamine, 22 grams of 2 ethylhexylamine and 30 grams of 3(2'ethylhexoxy) propylamine. The mixture is heated to boiling and the water of reaction is distilled. A TLC is performed to evaluate the completion of

reaction. When the test demonstrates that the reaction is complete, the system is distilled to 180°C under vacuum to remove all volatile material. The contents of the flask are then adjusted to 280 grams with alkylated naphthalene solvent. The product forms a fluid composition with good cold storage stability and a flash point in excess of 200°F. Addition of the product to uncolored automatic transmission fluid causes it to become a bluer shade of red than the compound of Example 3.

Example 5

137 grams of o-phenetidine, 15 grams of anhydrous sodium acetate, and 13.5 grams of anhydrous sodium carbonate is charged to a stirred 500 mL reaction flask. The mixture is heated to reflux to distill out traces of water. 20 grams of 1,5 dichloroanthraquinone is added and the mixture is cooled to 120°C. The mixture is then raised to reflux (195°C) and held overnight. The next morning the reaction is cooled to 70°C. 90 mL of methanol is added while cooling the mixture to 25°C. The product is filtered and washed with cold methanol. The filtercake is then reslurried with 600 mL of a 10% aqueous solution of hydrochloric acid to dissolve any entrained, unreacted o-phenetidine. The product is again filtered, washed with water, and dried. About 29 grams of product is obtained. The dye is readily soluble in uncolored automatic transmission fluid, imparting a bluish red shade with a wavelength of maximum absorbance of 540.5 nanometers.

Example 6

A 0.2% solution of the Unisol Liquid Red B brand of C.I. Solvent Red 164 in high stability automatic transmission fluid was prepared together with equivalent solutions of several of the dyes prepared in the preceding examples. These solutions were placed in stirred reaction flasks and heated to 190°C as an accelerated test of their stability. The transmission fluid manufacturers' test is usually terminated after 24 hours. As the following table shows, tests indicate that the color stability of

compositions of the present invention is materially greater than a conventional composition containing C.I. Solvent Red 164.

The heated solutions were sampled at intervals and the intensity of dye measured using heated uncolored transmission fluid as a control reference. Results

5 are as follows:

Color Intensity as a Measure of
Percentage of Original Dye Remaining

After Exposure at 190°C


Red Dye Tested	6 hours	24 hours	36 hours	48 hours
C.I. Solvent Red 164	86	65	50	26
Example 1	100	100	100	100
Example 3	100	99	98	86
Example 4	100	92	86	80
Example 5	100	100	100	98

10 From the above table it will be observed that all the dyes of the current invention, examples 1, 3, 4, and 5, are all much more resistant to degradation in heated automatic transmission fluid than is the prior art colorant C.I. Solvent Red 164. In general, compositions of the present invention will maintain about 80-100% of their color intensity upon heating for about 48 hours in accordance with Example
15 6 and about 90-100% of their color intensity after heating for about 24 hours in accordance with Example 6.

What Is Claimed Is:

1. A composition comprising automatic transmission fluid and at least one of the following dyes:


5

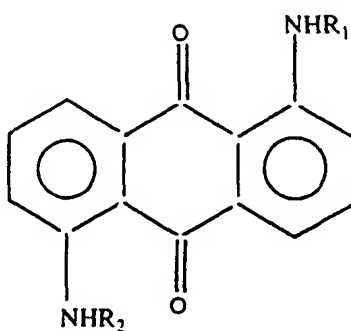

I.

10

15

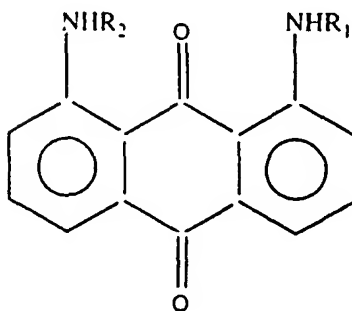


II.

wherein R₁ and R₂ are the same or different alkyl groups containing at least 2
20 carbons each or a cycloalkyl group containing at least 3 carbons, and said dye is
present in an amount sufficient to impart visible color to said fluid.


2. A composition comprising automatic transmission fluid and at least one of the following dyes:

5

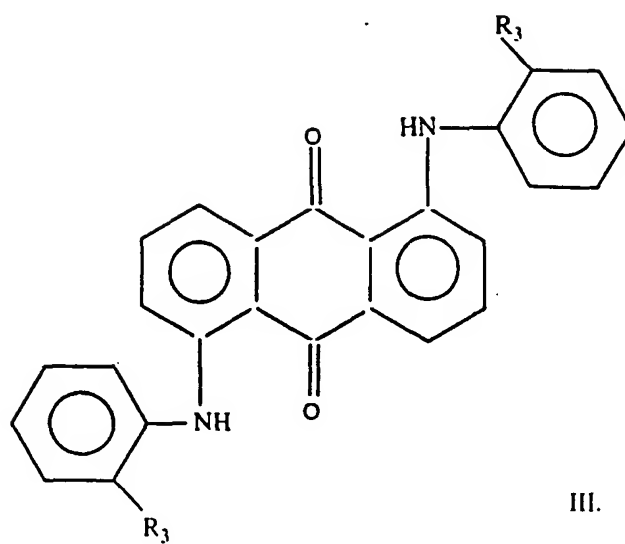

10


15

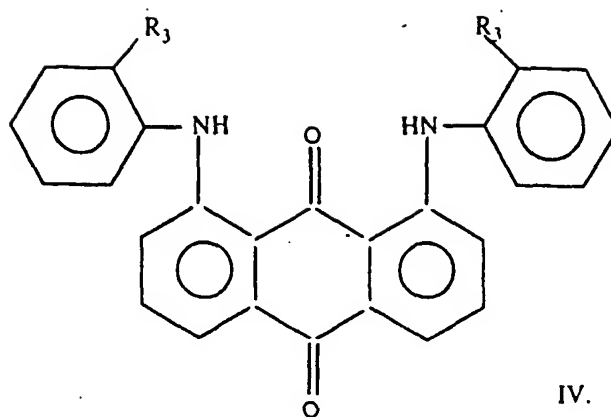


5 wherein R_3 is an alkyl or alkoxy group containing at least 2 carbons and said dye is present in amounts sufficient to impart visible color to said fluid.

3. A composition comprising automatic transmission fluid and at least two of the following dyes:

10

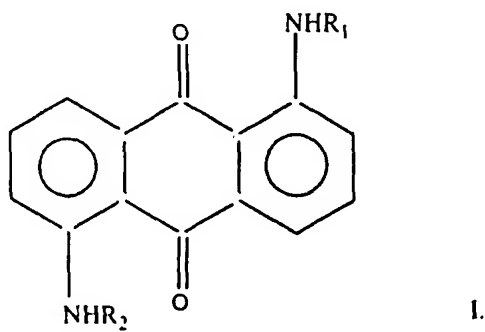


15

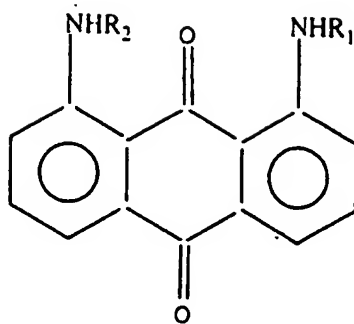

II.


5

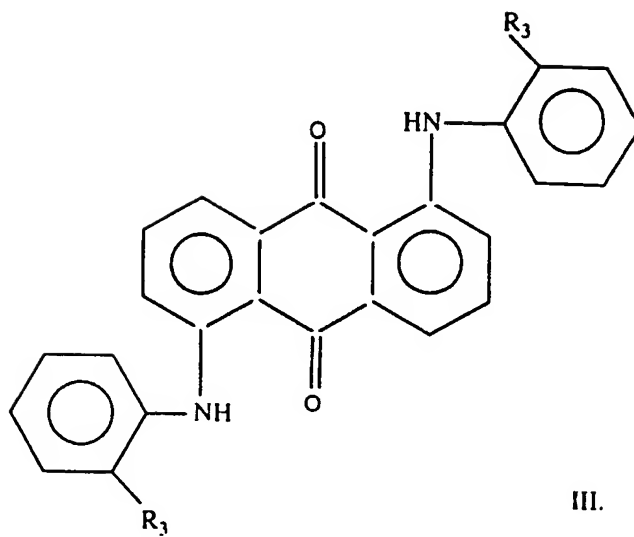

III.


10

15

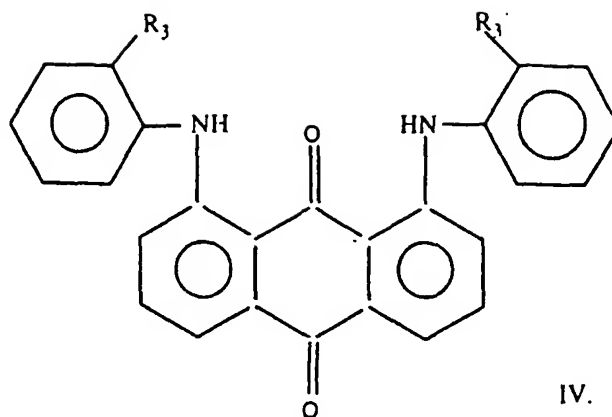


- 5 wherein R_1 and R_2 are the same or different alkyl groups containing at least 2 carbons each or a cycloalkyl group containing at least 3 carbons, and said dye is present in an amount sufficient to impart visible color to said fluid.
4. A composition as recited in claim 3 wherein said dye comprises a mixture of formulas I and II.
- 10 5. A composition as recited in claim 3 wherein said dye comprises a mixture of formulas III and IV.
6. A liquid dye concentrate comprising at least one of the following dyes:

15

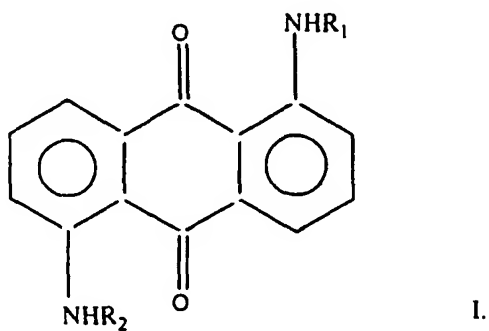


5

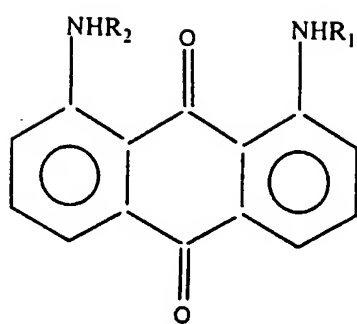

10

II.

15

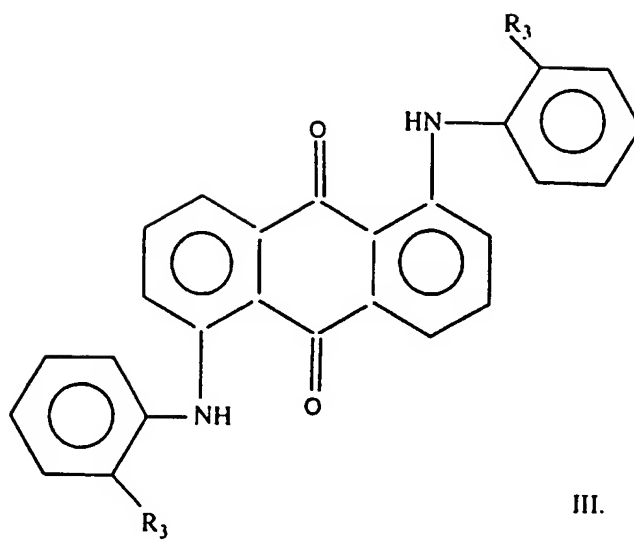


III.

20

16

5

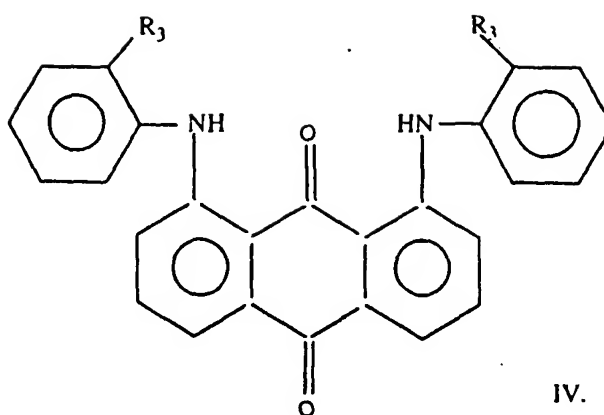

- wherein R_1 and R_2 are the same or different alkyl or substituted alkyl group
 10 containing at least 2 carbons each or a cycloalkyl group containing at least 3 carbons,
 and R_3 is an alkyl or alkoxy group containing at least 2 carbons, and
 a liquid carrier for said dye which is completely miscible with automatic
 transmission fluid and is a solvent for said dye, wherein said dye is present in said
 concentrate in about 20-60% of the total weight of said carrier and dye.
- 15 7. A composition according to claim 1 where R_1 and R_2 are both cyclohexyl.
 8. A dye according to claim 1 where R_1 and R_2 are a mixture of methoxypropyl,
 2' ethylhexyl and 2' ethylhexoxy groups.
 9. A dye according to claim 2 where R_3 is a 1 methylethyl group.
 10. A dye according to claim 2 where R_3 is an ethoxy group.
 20 11. A composition as recited in claim 7 wherein said transmission fluid contains
 about 0.01 to 1.0 percent of said dye.


12. A composition as recited in claim 4 wherein said transmission fluid contains about 0.05 to 5.0 percent of said dye.

13. A composition as recited in claim 9 wherein said transmission fluid contains about 0.05 to 1.0 percent of said dye.

5 14. A composition as recited in claim 10 wherein said transmission fluid contains about 0.05 to 1.0 percent of said dye.

15. A method of coloring automatic transmission fluid comprising obtaining an automatic transmission fluid, adding at least one of the following dyes to said fluid in an amount sufficient to visibly color said fluid:


10

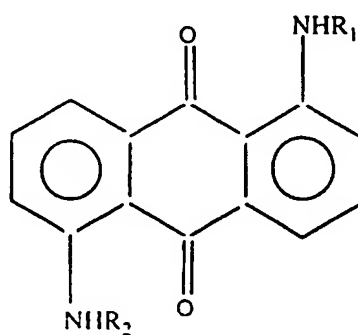

15


I.

20

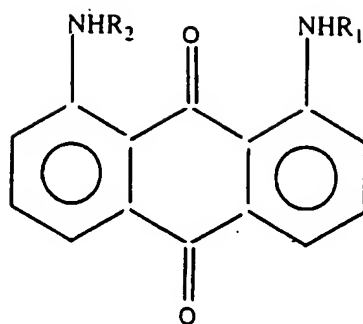

II.


5

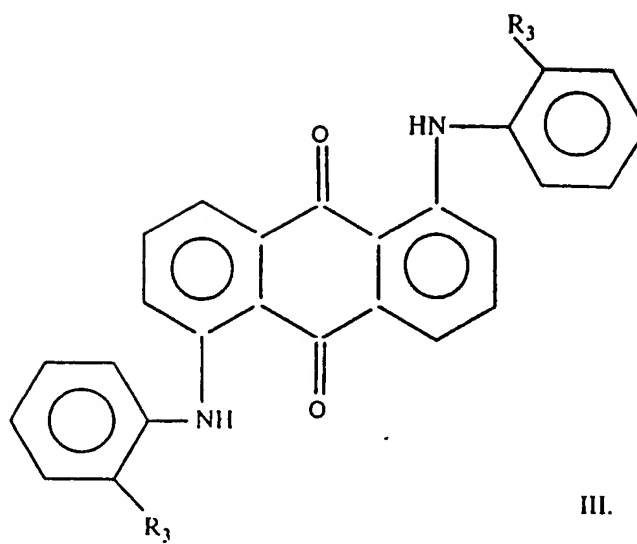

III.

10

15

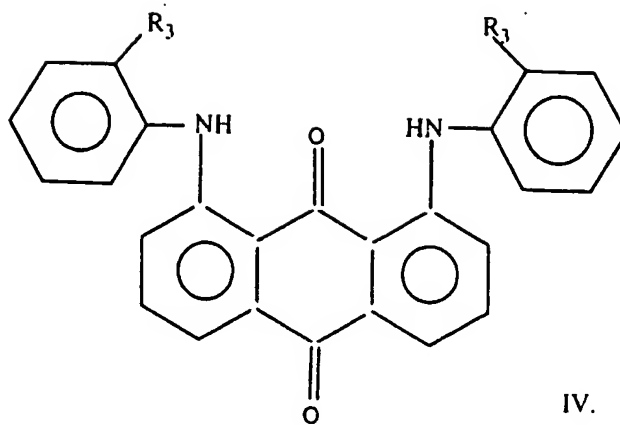

IV.

and dissolving said dye into said fluid.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 96/06526

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 C10M171/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C10M C10L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP,A,0 438 734 (BASF AKTIENGESELLSCHAFT) 31 July 1991 see page 3, line 44 - page 4, line 2 see page 4, line 31 - line 32 see page 4, line 53 - line 58 ---	2,9,10, 13,14
A	DE,C,849 158 (FARBENFABRIKEN BAYER) 11 September 1952 see page 1, column 2, line 15 - page 2, column 1, line 2 ---	1,3,4,12
A	AU,A,7 410 574 (CASTROL AUSTRALIA LIMITED) 15 April 1976 see page 4, line 1 - line 5 see page 4, line 23 - line 26 ---	1,2,6
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

13 August 1996

Date of mailing of the international search report

27.08.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

Hilgenga, K

INTERNATIONAL SEARCH REPORT

Int onal Application No

PCT/US 96/06526

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB,A,1 121 500 (BADISCHE ANILIN & SODA-FABRIK AKTIENGESELLSCHAFT) 31 July 1968 see page 1, line 28 - page 2, line 5 ---	1,8
A	US,A,3 164 449 (E.C. BUXBAUM) 5 January 1965 see column 1, line 35 - column 2, line 24 ---	1,3,4,6
A	US,A,5 372 735 (HIROKO OHTANI) 13 December 1994 see column 10, line 52 ---	
A	US,A,3 597 254 (F. GRASER) 3 August 1971 cited in the application -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/06526

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-438734	31-07-91	DE-A- 4001662 US-A- 5145573	25-07-91 08-09-92
DE-C-849158		NONE	
AU-A-7410574	15-04-76	NONE	
GB-A-1121500		CH-A- 456808 DE-B- 1259484 FR-A- 1456232 US-A- 3435054	11-01-67 25-03-69
US-A-3164449	05-01-65	NONE	
US-A-5372735	13-12-94	AU-B- 1165795 CA-A- 2142056 EP-A- 0670362 JP-A- 8053682 US-A- 5441656	17-08-95 11-08-95 06-09-95 27-02-96 15-08-95
US-A-3597254	03-08-71	BE-A- 721747 CH-A- 506584 DE-A- 1644482 FR-A- 1584880 GB-A- 1233793 NL-C- 132836 NL-A- 6814099	02-04-69 30-04-71 15-07-71 02-01-70 26-05-71 09-04-69